



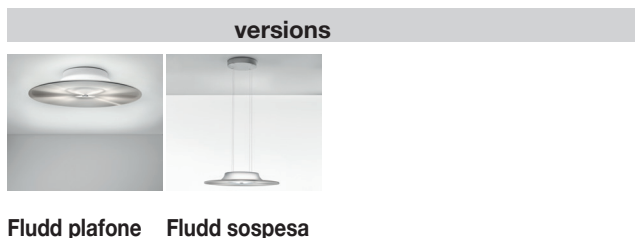
Fludd sospesa

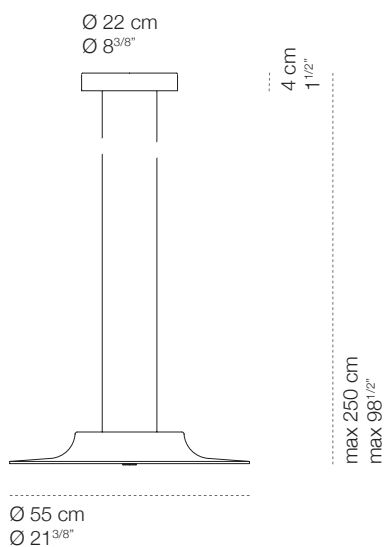


luminaire	
materials	technopolymers, aluminium, steel
environment	interiors
mounting location	ceiling
emission	diffuse light
weight	4,3 kg
voltage	220-240V
ballast	dimmable electronic integrated
dimming	phase cut / push / dali / casambi integrated
insulation class	1
IP classification	IP20
certifications	CE UK CA
design	Alessandro Scandurra, 2018

light source	
source	LED
number of led	60
power	30W
luminous flux	3.800 lm
colour temperature	2.700K
CRI	92

finish and code	
	opalescente-transparent
cod 1650	phase-cut dimmable
cod D1650	push/dali
cod C1650	casambi integrated



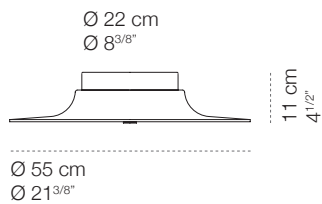


Fludd plafone



luminaire	
materials	technologymers, aluminium, steel
environment	interiors
mounting location	ceiling
emission	diffuse light
weight	4,1 kg
voltage	220-240V
ballast	dimnable electronic integrated
dimming	phase cut / push / dali / casambi integrated / voice
insulation class	1
IP classification	IP40
certifications	CE UK CA
design	Alessandro Scandurra, 2018

light source	
source	LED
number of led	60
power	30W
luminous flux	3.800 lm
colour temperature	2.700K
CRI	92

finish and code	
	opalescente-transparent
cod 1651	phase-cut dimmable
cod D1651	push/dali
cod C1651	casambi integrated

versions	
	
Fludd plafone	Fludd sospesa