

miniTensoOnirico opalescente puntinato

halogen energy saver

Plug in/out halogen miniTensoLuminaire, cable-mounted operating 230V without any transformer, for general lighting:

- longitudinale, mostly indirect
- opalescente puntinato, balanced direct and indirect.

No tools needed for installation: just insert it, like a plug in a socket.



57

6 1/8"

40


1 5/8"

LUMINAIRE


finish	silver
code	354
materials	aluminium, borosilicate glass
environment	interiors
mounting location	on cables
emission	indirect and diffused light
weight	0,2 kg
tension	230V
insulation class	2
IP classification	IP20
marks	CE    

design Luta Bettonica, Mario Melocchi, 2003

LIGHT SOURCE

source	 halogen energy saver
socket	R7s
ILCOS code	HDG74,9
bulb included	yes
number of bulbs	1
power	120W (max 200W)
life	2.000 h
energy label	C
luminous flux	2.450 lm
colour temperature	2.900 °K

ACCESSORIES FOR INSTALLATION

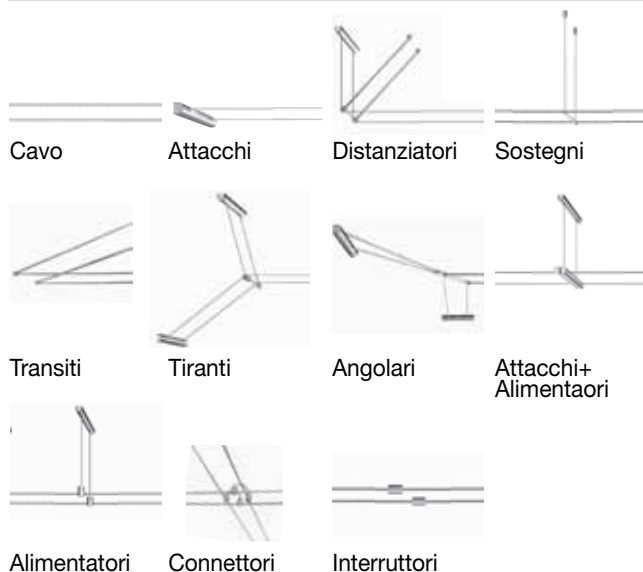

DIFFUSERS

miniTensoArchi
cod 317

miniTensoCieli
cod 316